


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

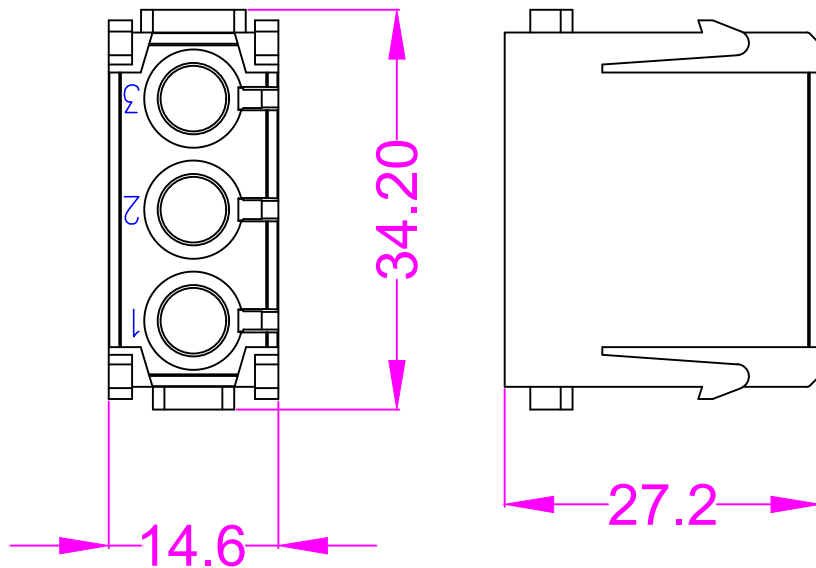

技术参数:

接插针数: 3

材料: 聚甲醛

工作温度范围: $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$

阻燃等级UL94: V0

插拔次数: ≥ 500


管道直径: $(1.6\text{mm}/1/16'')$
 $3\text{mm} (4.0\text{mm}/1/8'')$

工作压力: up 8 par/116psi

密封件: 丁晴橡胶

闭锁阀: 聚丙烯

Specifications:
 Number of contacts: 3
 Material: Delrin acetal
 Limiting temperatures: -40°C~+80°C
 Flammability acc.to(UL94): V0
 Mechanical working life(mating cycles): ≥500
 Pipe internal diameter: (1.6mm/1/16")
 3mm(4.0mm/1/8")
 Working pressure: up 8 bar/116psi
 Sealing: Buna
 Shut off valve: Polypropylen

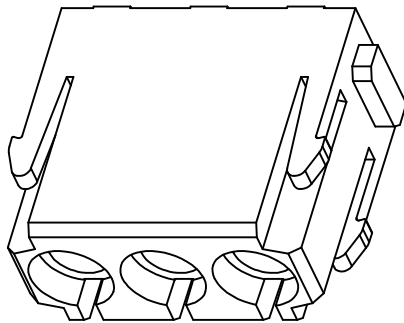

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OKERUI CONNECTOR CO.,LTD.		
0~≤20 ±0.15	DRAW			Size	A4	PART NAME: HZW-HMP-003		
20~≤50 ±0.25	DESIGN			Scale				
50~≤80 ±0.35	CHECK			Sheet		Drawing NO.		REV
80~≤120 ±0.50	APPROVE			Proj.		Material		A