

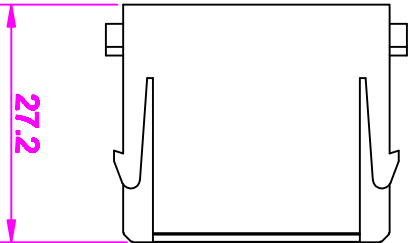


7				8	
REVISION DATA					
SYM	ECN	DESCRIPTION	DATE	APPROVED	

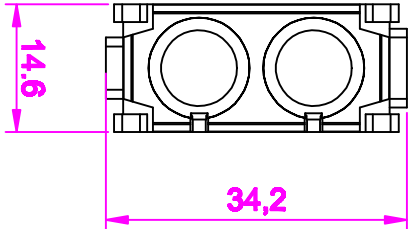

技术参数:
 接插件数: 2
 材料: 聚甲醛
 工作温度范围: -40℃~+80℃
 阻燃等级UL94: V0
 插拔次数: ≥500
 管道直径: (6.0mm/1/4")
 工作压力: up 8 bar/116psi
 密封件: 丁晴橡胶
 闭锁阀: 聚丙烯

Specifications:
 Number of contacts: 2
 Material: Delrin acetal
 Limiting temperatures: -40℃~+80℃
 Flammability acc.to(UL94): V0
 Mechanical working life(mating cycles): ≥500
 Pipe internal diameter: (6.0mm/1/4")
 Working pressure: up 8 bar/116psi
 Sealing: Buna
 Shut off valve: Polypropylene



Tolerance	SIGNATURE	DATE	Units	mm	PART NAME: HZW-HMP-002	
0~≤20 ±0.15	DRAW		Size	A4	OUKERUI® 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO.,LTD.	
20~≤50 ±0.25	DESIGN		Scale			
50~≤80 ±0.35	CHECK		Sheet			
80~≤120 ±0.50	APPROVE		Proj.		Drawing NO.	REV
			Material			A