


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

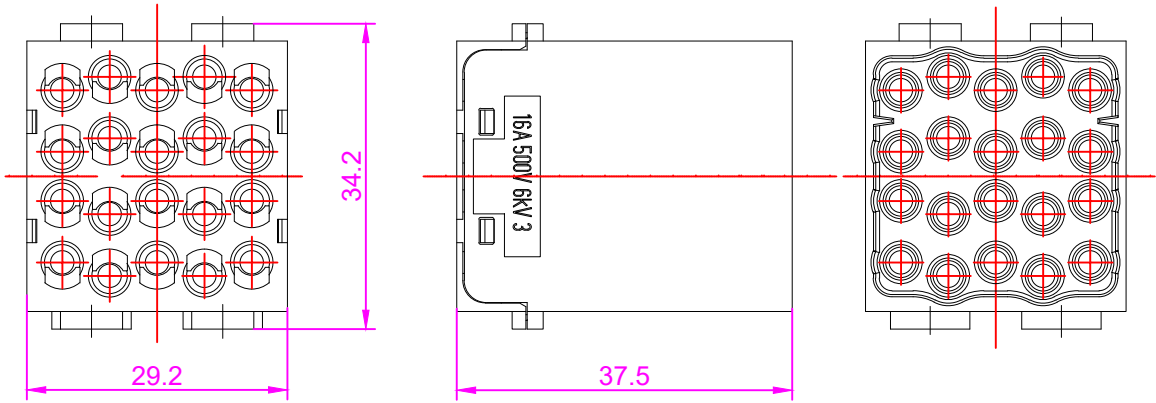


技术参数:
插芯:
插针数: 20
额定电流: 16A
工作电压: 500V
额定脉冲电压: 6KV
污染等级: 3
材料: Polycarbonate

Specifications:
Inserts:
Number of contacts: 20
Rated current: 16A
Rated voltage: 500V
Rated impulse voltage: 6KV
Pollution degree: 3
Material: Polycarbonate

插针:
接线方式: 冷压连接
材料: 铜合金
表面处理: 镀银/镀金
接触电阻: $\leq 1m\Omega$
线径范围: 0.14~4mm² (AWG26-12)

Contacts:
Terminal: Crimp terminal
Material: Brass
Surfac: hard-silver plated/Glod plated
Contact resistance: $\leq 1m\Omega$
Crimp terminal
Wire gauge--mm²: 0.14~4.0mm²
Wire gauge--AWG: 26-12

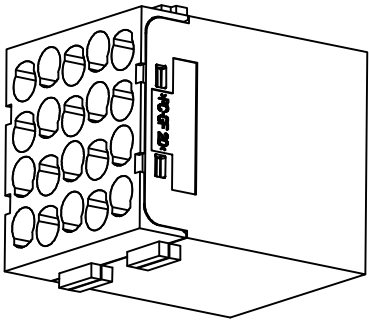

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司		
0~ ≤ 20 ± 0.15	DRAW			Size	A4	NINGBO OUKERUI CONNECTOR CO.,LTD.		
20~ ≤ 50 ± 0.25	DESIGN			Scale		PART NAME: HZW-HMEE-020-MC		
50~ ≤ 80 ± 0.35	CHECK			Sheet		Drawing NO.		REV
80~ ≤ 120 ± 0.50	APPROVE			Proj.		Material		A