
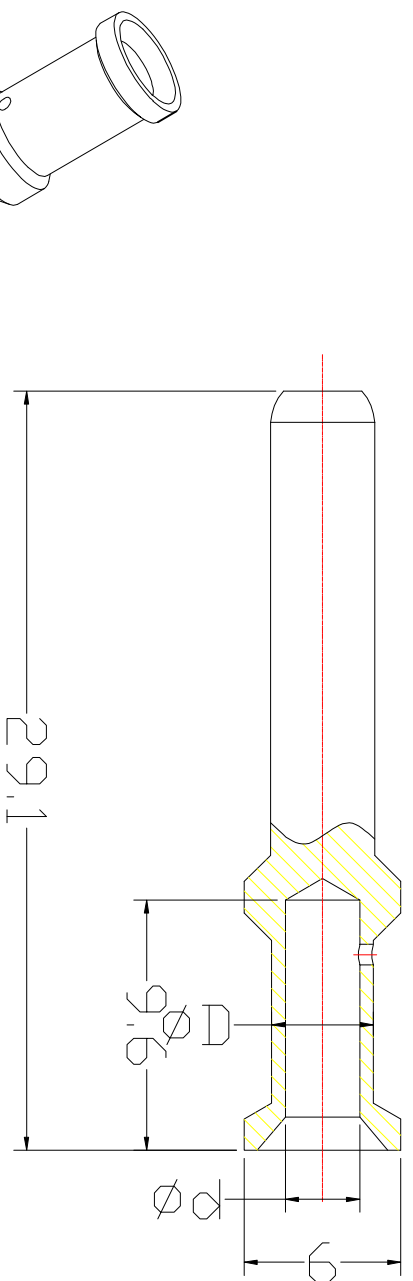


表面镀层	表面镀金	Wire gauge	φ	D
CCSM-1.5	CCGM-1.5	1.5 mm <sup>2</sup> AWG 16	1.75	3.0
CCSM-2.5	CCGM-2.5	2.5 mm <sup>2</sup> AWG 14	2.25	3.5
CCSM-4.0	CCGM-4.0	4.0 mm <sup>2</sup> AWG 12	2.85	3.9
CCSM-6.0	CCGM-6.0	6.0 mm <sup>2</sup> AWG 10	3.5	5
CCSM-10.0	CCGM-10.0	10.0 mm <sup>2</sup> AWG 8	4.3	5.6

REVISION DATA		
SYM	DESCRIPTION	DATE



技术参数:  
01、材料: 铜合金  
02、表面处理: 镀银/镀金  
03、额定电流: 40A  
04、接触电阻:  $\leq 3m\Omega$   
05、线径范围: 1.5-2.5mm<sup>2</sup> (16-8 AWG)  
06、可插拔次数:  $\geq 500$

Tolerance	SIGNATURE	DATE	Units	mm	Part Name
0~≤6 ±0.03	DRAW		Size	A4	 <b>宁波欧科瑞连接器有限公司</b> NINGBO QIKERUI CONNECTOR CO., LTD.
6~≤20 ±0.06	DESIGN		Scale	1.5:1	
20~≤50 ±0.10	CHECK		Sheet	1/1	
50~≤80 ±0.20	APPROVE		Proj.		

1	2	3	4	5	6	7	8

1 2 3 4 5 6 7 8