

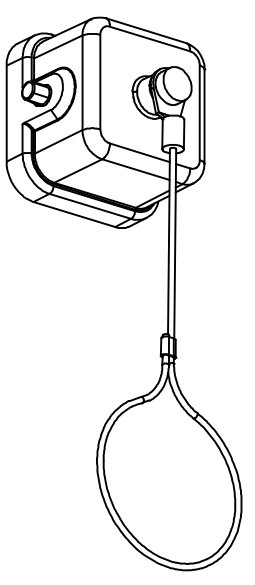


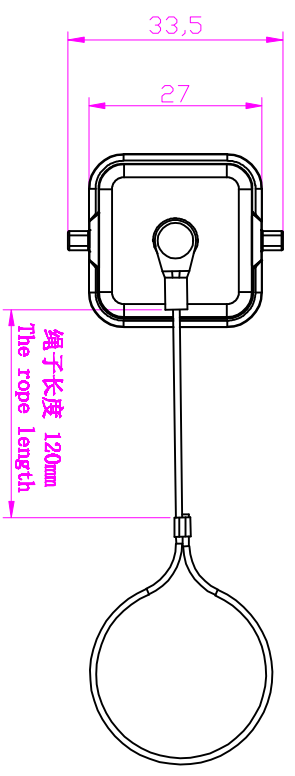

| REVISION DATA | | | | |
|---------------|-----|-------------|------|----------|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |

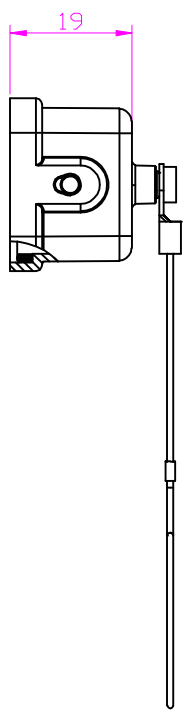

技术参数:
材料: 压铸锌
表面处理: 粉末喷涂
颜色: RAL7037灰色
温度范围: -40℃~+125℃
防护等级: IP65 (联锁状态)
密封元件: NBR

Specifications:
Material: zinc die-cast
Surface: powder-coated
Color: Grey (RAL 7037)
Limiting temperatures: -40℃~+125℃
Degree of protection : IP65
Hoods/Housings sealing: NBR

| Tolerance | SIGNATURE | DATE | Units | mm |  宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO., LTD. |
|---------------|-----------|------|-------|--|---|
| 0~≤20 ±0.15 | DRAW | | Size | A4 | |
| 20~≤50 ±0.25 | DESIGN | | Scale | | PART NAME: H2W-H3A-MCV-2G/1F |
| 50~≤80 ±0.35 | CHECK | | Sheet | | Drawing NO. |
| 80~≤120 ±0.50 | APPROVE | | Proj. |  | Material |
| | | | | | REV |
| | | | | | A |