



REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

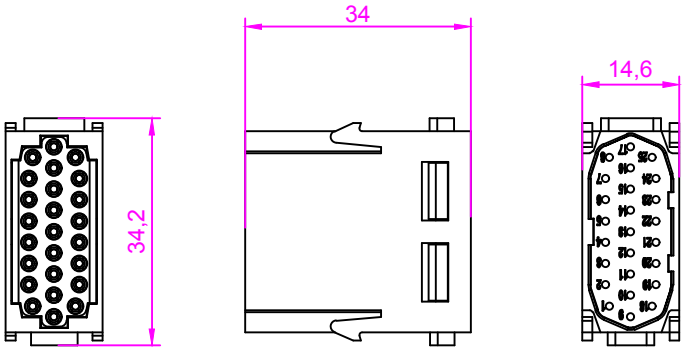

技术参数:
插芯:
插针数: 25
额定电流: 4A
工作电压: 50V
额定耐受脉冲电压: 0.8KV
污染等级: 3
绝缘阻抗: $\geq 10\ \Omega$
材料: 聚碳酸酯
颜色:RAL 7032(浅灰色)
温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
依据UL94的阻燃等级: V0
可插拔次数: ≥ 500
插针:
接线方式: 冷压连接
材料: 铜合金
表面处理: 镀银
接触电阻: $\leq 3\text{m}\ \Omega$
线径范围: 0.09~0.82mm² (28-18AWG)
工具:
 . 冷压钳: TL03
 . 退针器: TL08

Specifications:
Inserts:
Number of contacts: 25
Rated current: 4A
Rated voltage: 50V
Rated impulse voltage: 0.8KV
Pollution degree: 3
Insulation resitance: $\geq 10\ \Omega$
Material:Polycarbonate
Colour: RAL 7032(light grey)
Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
Flammability acc.to UL 94:V0
Mating cyales: ≥ 500

Contacts:
Terminal: Crimp terminal
Material: copper alloy
Surfac: hard-silver plated
Contact resistance: $\leq 3\text{m}\ \Omega$
Wire gauge—mm²: 0.09~0.82mm²
Wire gauge—AWG: 28-18
Tools:
 .Crimp contact:TL03
 .Contact removal:TL08

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OKERUI CONNECTOR CO.,LTD.			
0~ ≤ 20 ± 0.15	DRAW			Size	A4				
20~ ≤ 50 ± 0.25	DESIGN			Scale		PART NAME: HZW-HMDS-025-MC			
50~ ≤ 80 ± 0.35	CHECK			Sheet		Drawing NO.			REV
80~ ≤ 120 ± 0.50	APPROVE			Proj.		Material			A