


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED


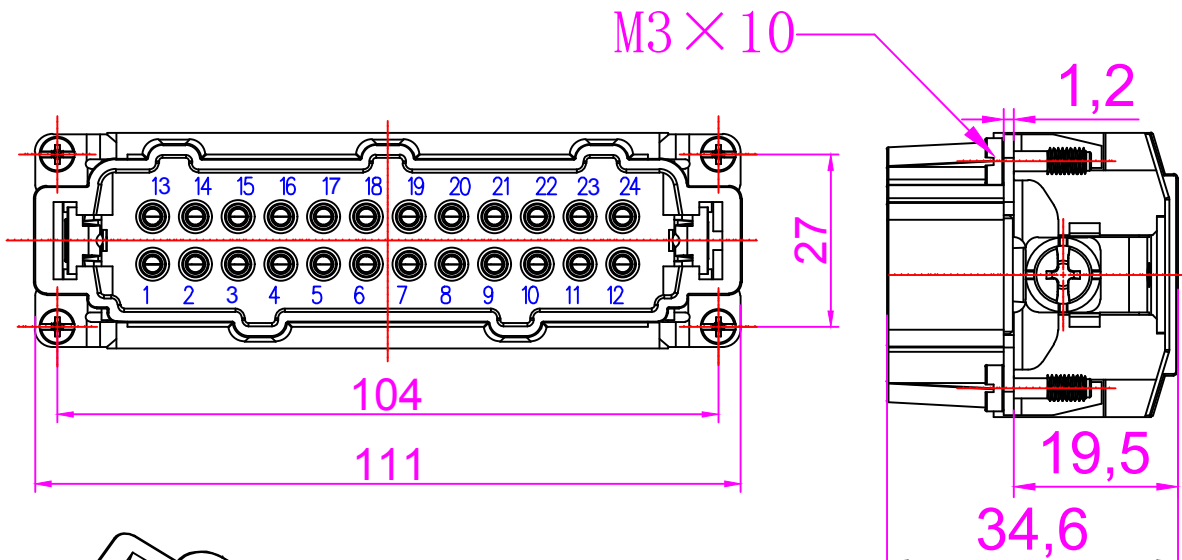


技术参数:
接插体:
插针数: 24P+PE
工作电流: 16A
工作电压: 500V
额定脉冲电压: 6KV
污染等级: 3
绝缘阻抗: $\geq 10^{10} \Omega$
材料: 聚碳酸酯
温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
依据UL94的阻燃等级: V0
插拔次数: ≥ 500

接插针:
接线方式: 弹片连接
材料: 黄铜
表面处理: 镀银/镀金
接触电阻: $\leq 1\text{m}\Omega$
导线规格: 0.14~2.5mm² (AWG26-14)
剥线长度: 10mm

Specifications:
Inserts:
Number of contacts: 6P+PE
Rated current: 16A
Rated voltage: 500V
Rated impulse voltage: 6KV
Pollution degree: 3
Insulation resistance: $\geq 10^{10} \Omega$
Material: Polycarbonate
Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Flammability acc.to(UL94): V0
Mechanical working life -mating cycles: ≥ 500

Contacts:
Terminal: spring terminal
Material:copper alloy
Surfac: Silver plated/Gold plated
Contact resistance: $\leq 1\text{m}\Omega$
Wire gauge—mm²: 0.14~2.5mm²
Wire gauge—AWG: 26-14
Stripping length:10mm

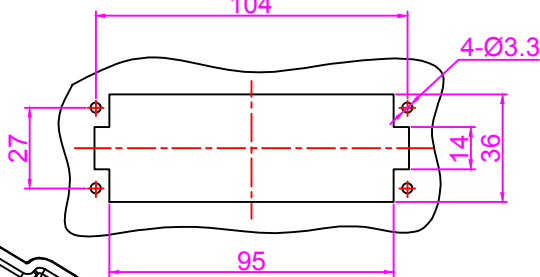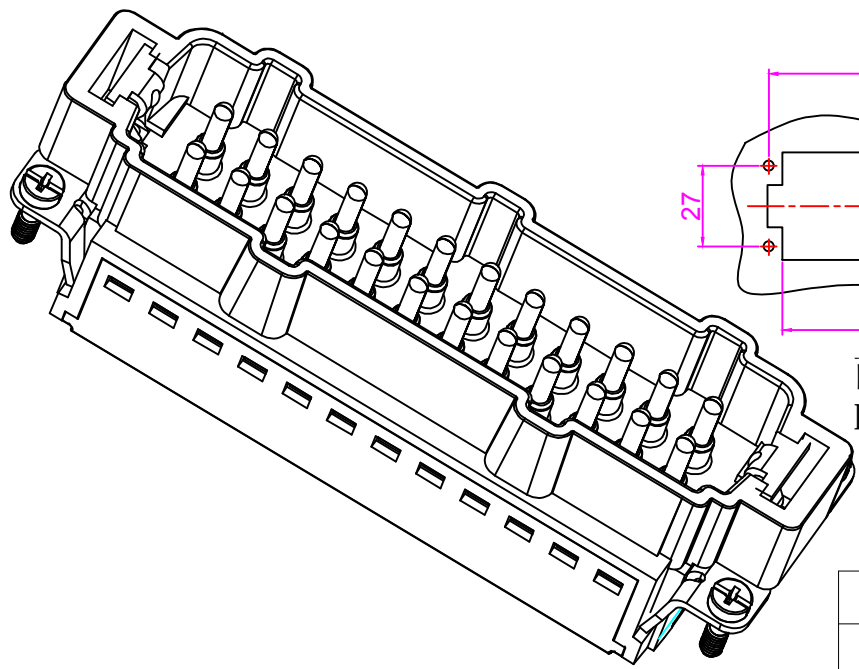

面板开孔图
Panel cut

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OKERUI CONNECTOR CO.,LTD.			
0~ ≤ 20 ± 0.15	DRAW			Size	A4				
20~ ≤ 50 ± 0.25	DESIGN			Scale		PART NAME: HZW-HE-024-MSP			
50~ ≤ 80 ± 0.35	CHECK			Sheet		Drawing NO.			REV
80~ ≤ 120 ± 0.50	APPROVE			Proj.		Material			A