
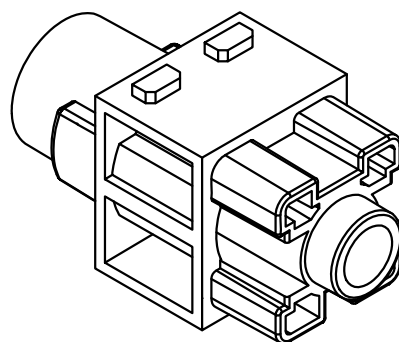


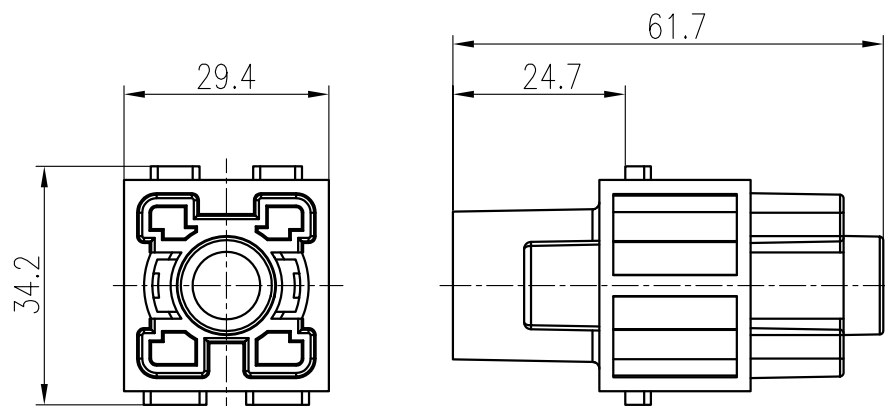


Specifications

Inserts

- 01、Number of contacts: 2
- 02、Rated current: 200A
- 03、Rated voltage: 1000V
- 04、Pollution degree: 3
- 05、Rated impulse voltage: 8KV
- 06、Insulation resistance: $\geq 10^{10} \Omega$
- 07、Material: PC
- 08、Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 09、Flammability acc.to(UL94): V0
- 10、Mechanical working life -mating cycles: ≥ 500

Contacts

- 01、Material: COPPER ALLOY
- 02、Surface: hard-silver plated
- 03、Contact resistance: $\leq 0.3\text{m}\Omega$
- 04、Crimp terminal
- 05、---mm²: 25-50mm²
- 06、Max.insulation diameter:18mm

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO.,LTD.			
0~≤20 ±0.15	DRAW			Size	A4				
20~≤50 ±0.25	DESIGN			Scale		PART NAME: HZW-H2MK-001-FC			
50~≤80 ±0.35	CHECK			Sheet		Drawing NO.		REV	
80~≤120 ±0.50	APPROVE			Proj.		Material		A	