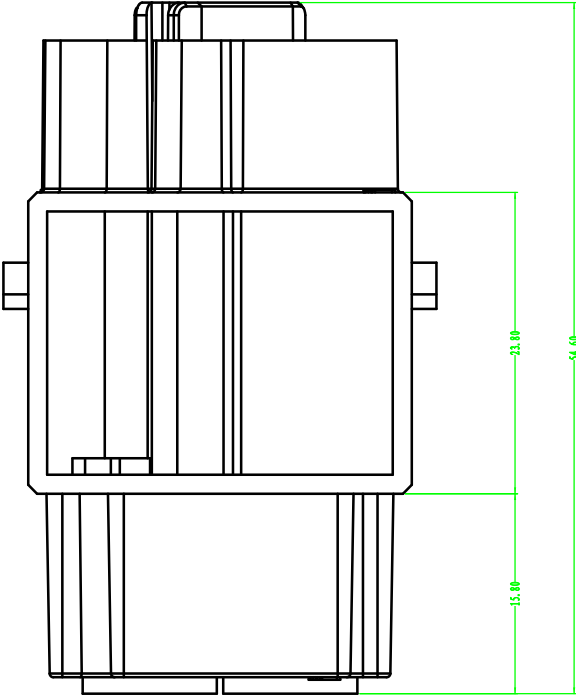
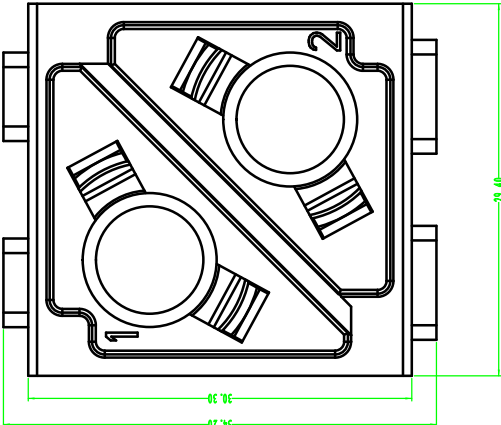
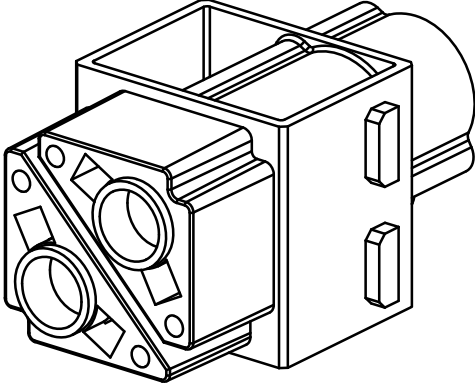


1		2		3		4		5		6		7		8																																		
A																																																
 																																																
B																																																
技术参数: 插芯: - 插针数: 2 - 额定电流: 100A - 额定电压: 1000V - 额定脉冲电压: 8kV - 污染等级: 3 - 绝缘阻抗: $>10^{10} \Omega$ - 材料: 聚碳酸酯 - 颜色: RAL 7032 (浅灰色) - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$ - 依据UL 94的阻燃等级: V0 - 可插拔次数: >500 插针: - 接线方式: 冷压连接 - 材料: 铜合金 - 表面处理: 镀银 - 接触电阻: $\leq 0.3\text{m}\Omega$ - 线径范围: $10\text{-}35\text{mm}^2$ - 最大电缆直径: 14mm																																																
C																																																
Technical specification: Insters: - No. of contact: 2 - Rated current: 100A - Rated voltage: 1000V - Rated impulse voltage: 8kV - Pollution degree: 3 - Insulation resistance: $>10^{10} \Omega$ - Material: polycarbonate - Colour: RAL 7032(light grey) - Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$ - Flammability acc.to UL 94: V0 - Mating cycles: >500 Contacts: - Terminal: crimp terminal - Material: copper alloy - Surface: hard-silver plated - Contact resistance: $\leq 0.3\text{m}\Omega$ - Wire gauge: $10\text{-}35\text{mm}^2$ - Max. insulation diameter: 14mm - Stripping length: 14mm																																																
D																																																
E																																																
F																																																
 <table><tr><td>Tolerance</td><td>SIGNATURE</td><td>DATE</td><td>Units</td><td>mm</td></tr><tr><td>0~$\leq 20 \pm 0.15$</td><td>DRAW</td><td></td><td>Size</td><td>A4</td></tr><tr><td>20~$\leq 50 \pm 0.25$</td><td>DESIGN</td><td></td><td>Scale</td><td></td></tr><tr><td>50~$\leq 80 \pm 0.35$</td><td>CHECK</td><td></td><td>Sheet</td><td></td></tr><tr><td>80~$\leq 120 \pm 0.50$</td><td>APPROVE</td><td></td><td>Proj.</td><td></td></tr></table> <table><tr><td colspan="2">宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO., LTD.</td></tr><tr><td colspan="2">PART NAME: HZW-H2MK-002-FC</td></tr><tr><td>Drawing NO.</td><td>REV</td></tr><tr><td>Material</td><td>A</td></tr></table>																Tolerance	SIGNATURE	DATE	Units	mm	0~ $\leq 20 \pm 0.15$	DRAW		Size	A4	20~ $\leq 50 \pm 0.25$	DESIGN		Scale		50~ $\leq 80 \pm 0.35$	CHECK		Sheet		80~ $\leq 120 \pm 0.50$	APPROVE		Proj.		宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO., LTD.		PART NAME: HZW-H2MK-002-FC		Drawing NO.	REV	Material	A
Tolerance	SIGNATURE	DATE	Units	mm																																												
0~ $\leq 20 \pm 0.15$	DRAW		Size	A4																																												
20~ $\leq 50 \pm 0.25$	DESIGN		Scale																																													
50~ $\leq 80 \pm 0.35$	CHECK		Sheet																																													
80~ $\leq 120 \pm 0.50$	APPROVE		Proj.																																													
宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO., LTD.																																																
PART NAME: HZW-H2MK-002-FC																																																
Drawing NO.	REV																																															
Material	A																																															
7																																																
8																																																