
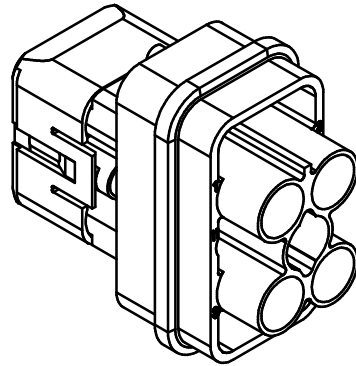
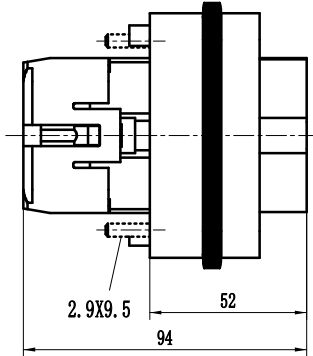


6		7	8	
SYM		ECN	DESCRIPTION	DATE



技术参数:
插芯:
插针数: 4/2+PE
额定电流: 40/10A
工作电压: 690/250V
额定脉冲电压: 6/4KV
污染等级: 3
依据UL/CSA的额定电压: 600/250V
绝缘阻抗: $\geq 10^{10} \Omega$
材料: 聚碳酸酯
温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
依据UL94的阻燃等级: V0
可插拔次数: ≥ 500

插针:
接线方式: 冷压连接
材料: 铜合金
表面处理: 镀银
接触电阻: $\leq 1\text{m}\Omega$
线径范围: 1.5-6mm² (AWG16-10)
0.14-2.5mm (AWG26-14)
剥线长度: 5mm/7mm

Specifications:
Inserts:
Number of contacts: 4/2+PE
Rated current: 40/10A
Rated voltage: 690/250V
Rated impulse voltage: 6KV
Pollution degree: 3
Rated voltage acc.to UL/CSA:600/250V
Insulation resistance: $\geq 10^{10} \Omega$
Material: Polycarbonate
Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Flammability acc.to(UL94): V0
Mechanical working life -mating cycles: ≥ 500

Contacts:
Terminal: crimp terminal
Material: Brass
Surfac: hard-silver plated
Contact resistance: $\leq 1\text{m}\Omega$
Crimp terminal
Wire gauge—mm²: 1.5-6mm² (AWG16-10)
0.14-2.5mm (AWG26-14)
Stripping length:5mm/7mm

Tolerance		SIGNATURE	DATE	Units	mm	NINGBO OUKERUI CONNECTOR CO.,LTD.		
0~≤20 ±0.15	DRAW			Size	A4	PART NAME: HZW-HQ-004/2-MC		
20~≤50 ±0.25	DESIGN			Scale		Drawing NO.		REV
50~≤80 ±0.35	CHECK			Sheet		Material		A
80~≤120 ±0.50	APPROVE			Proj.				