
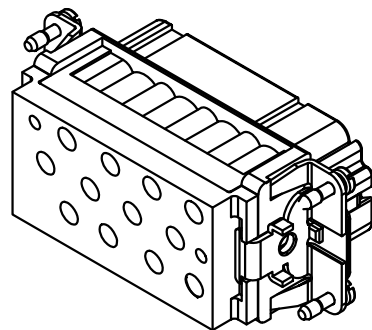


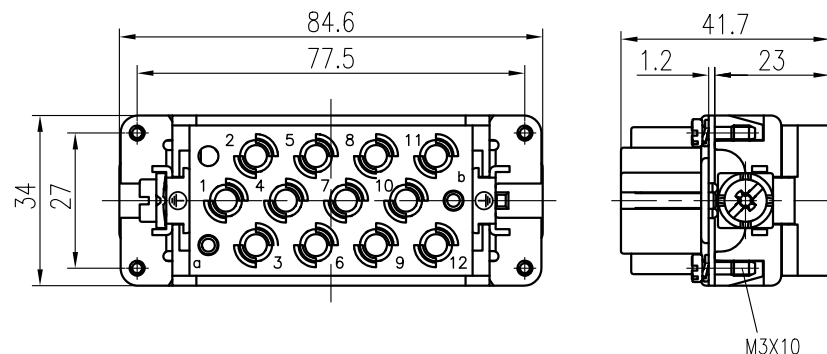

技术参数:

插芯:

插针数: 12/2+PE

额定电流: 40A/10A

工作电压: 690V/250V

额定脉冲电压: 8KV/4KV

污染等级: 3

依据UL/CSA的额定电压: 600V/300V

绝缘阻抗: $\geq 10^{10} \Omega$

材料: 聚碳酸酯

温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

依据UL94的阻燃等级: V0

可插拔次数: ≥ 500

插针:

接线方式: 冷压连接

材料: 铜合金

表面处理: 镀银

接触电阻: $\leq 0.3\text{m}\Omega/3\text{m}\Omega$

线径范围: $1.5\text{--}6\text{mm}^2$ (16-10 AWG)

$0.14\text{--}2.5\text{mm}^2$ (26-14 AWG)

Specifications:

Inserts:

Number of contacts: 12/2+PE

Rated current: 40A/10A

Rated voltage: 690V/250V

Rated impulse voltage: 8KV/4KV

Pollution degree: 3

Rated voltage acc.to UL/CSA:600V/300V

Insulation resistance: $\geq 10^{10} \Omega$

Material: Polycarbonate

Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Flammability acc.to(UL94): V0

Mechanical working life -mating cycles: ≥ 500

Contacts:

Terminal: crimp terminal

Material: Copper alloy


Surfac: hard-silver plated

Contact resistance: $\leq 0.3\text{m}\Omega/3\text{m}\Omega$

Crimp terminal

Wire gauge— mm^2 : $1.5\text{--}6\text{mm}^2$ (16-10 AWG)

$0.14\text{--}2.5\text{mm}^2$ (26-14 AWG)

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司			
$0 \sim \leq 20$	± 0.15	DRAW		Size	A4	NINGBO OUKERUI CONNECTOR CO.,LTD.			
$20 \sim \leq 50$	± 0.25	DESIGN		Scale		PART NAME: HZW-HK-012/2-FC			
$50 \sim \leq 80$	± 0.35	CHECK		Sheet		Drawing NO.		REV	
$80 \sim \leq 120$	± 0.50	APPROVE		Proj.		Material		A	