
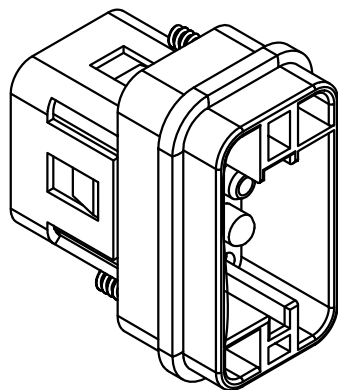
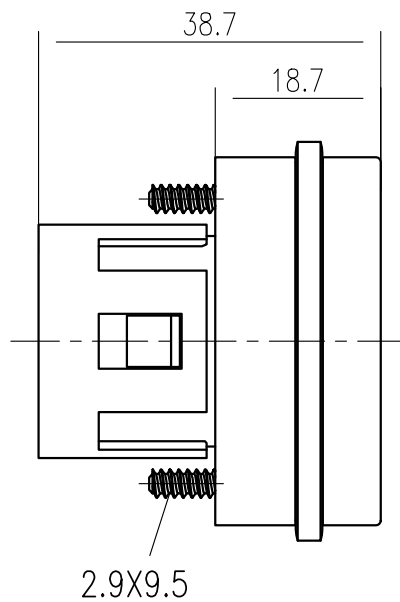


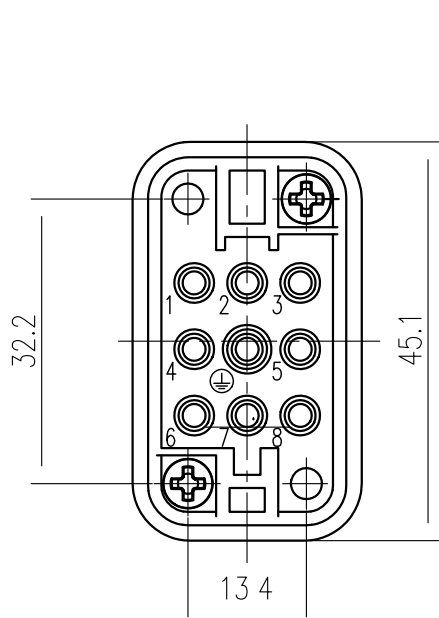

技术参数:

插芯:

插针数: 8+PE

额定电流: 16A

工作电压: 500V

额定脉冲电压: 6KV

污染等级: 3

依据UL/CSA的额定电压: 600V

绝缘阻抗: $\geq 10^{10} \Omega$

材料: 聚碳酸酯

温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

依据UL94的阻燃等级: V0

可插拔次数: ≥ 500

插针:

接线方式: 冷压连接

材料: 铜合金

表面处理: 镀银/镀金

接触电阻: $\leq 1\text{m}\Omega$

线径范围: $0.14\sim 4\text{mm}^2$ (26-12 AWG)

Specifications:

Inserts:

Number of contacts: 8+PE

Rated current: 16A

Rated voltage: 500V

Rated impulse voltage: 6KV

Pollution degree: 3

Rated voltage acc.to UL/CSA:600V

Insulation resistance: $\geq 10^{10} \Omega$

Material: Polycarbonate

Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

Flammability acc.to(UL94): V0

Mechanical working life -mating cycles: ≥ 500

Contacts:

Terminal: crimp terminal

Material: Copper alloy

Surfac: hard-silver plated/Hard-gold plated

Contact resistance: $\leq 1\text{m}\Omega$

Crimp terminal

Wire gauge— mm^2 : $0.14\sim 4\text{mm}^2$ (26-12 AWG)

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO.,LTD.			
0~ ≤ 20	± 0.15	DRAW		Size	A4	PART NAME: HZW-HQ-008/0-MC			
20~ ≤ 50	± 0.25	DESIGN		Scale		Drawing NO.		REV	
50~ ≤ 80	± 0.35	CHECK		Sheet		Material		A	
80~ ≤ 120	± 0.50	APPROVE		Proj.	