


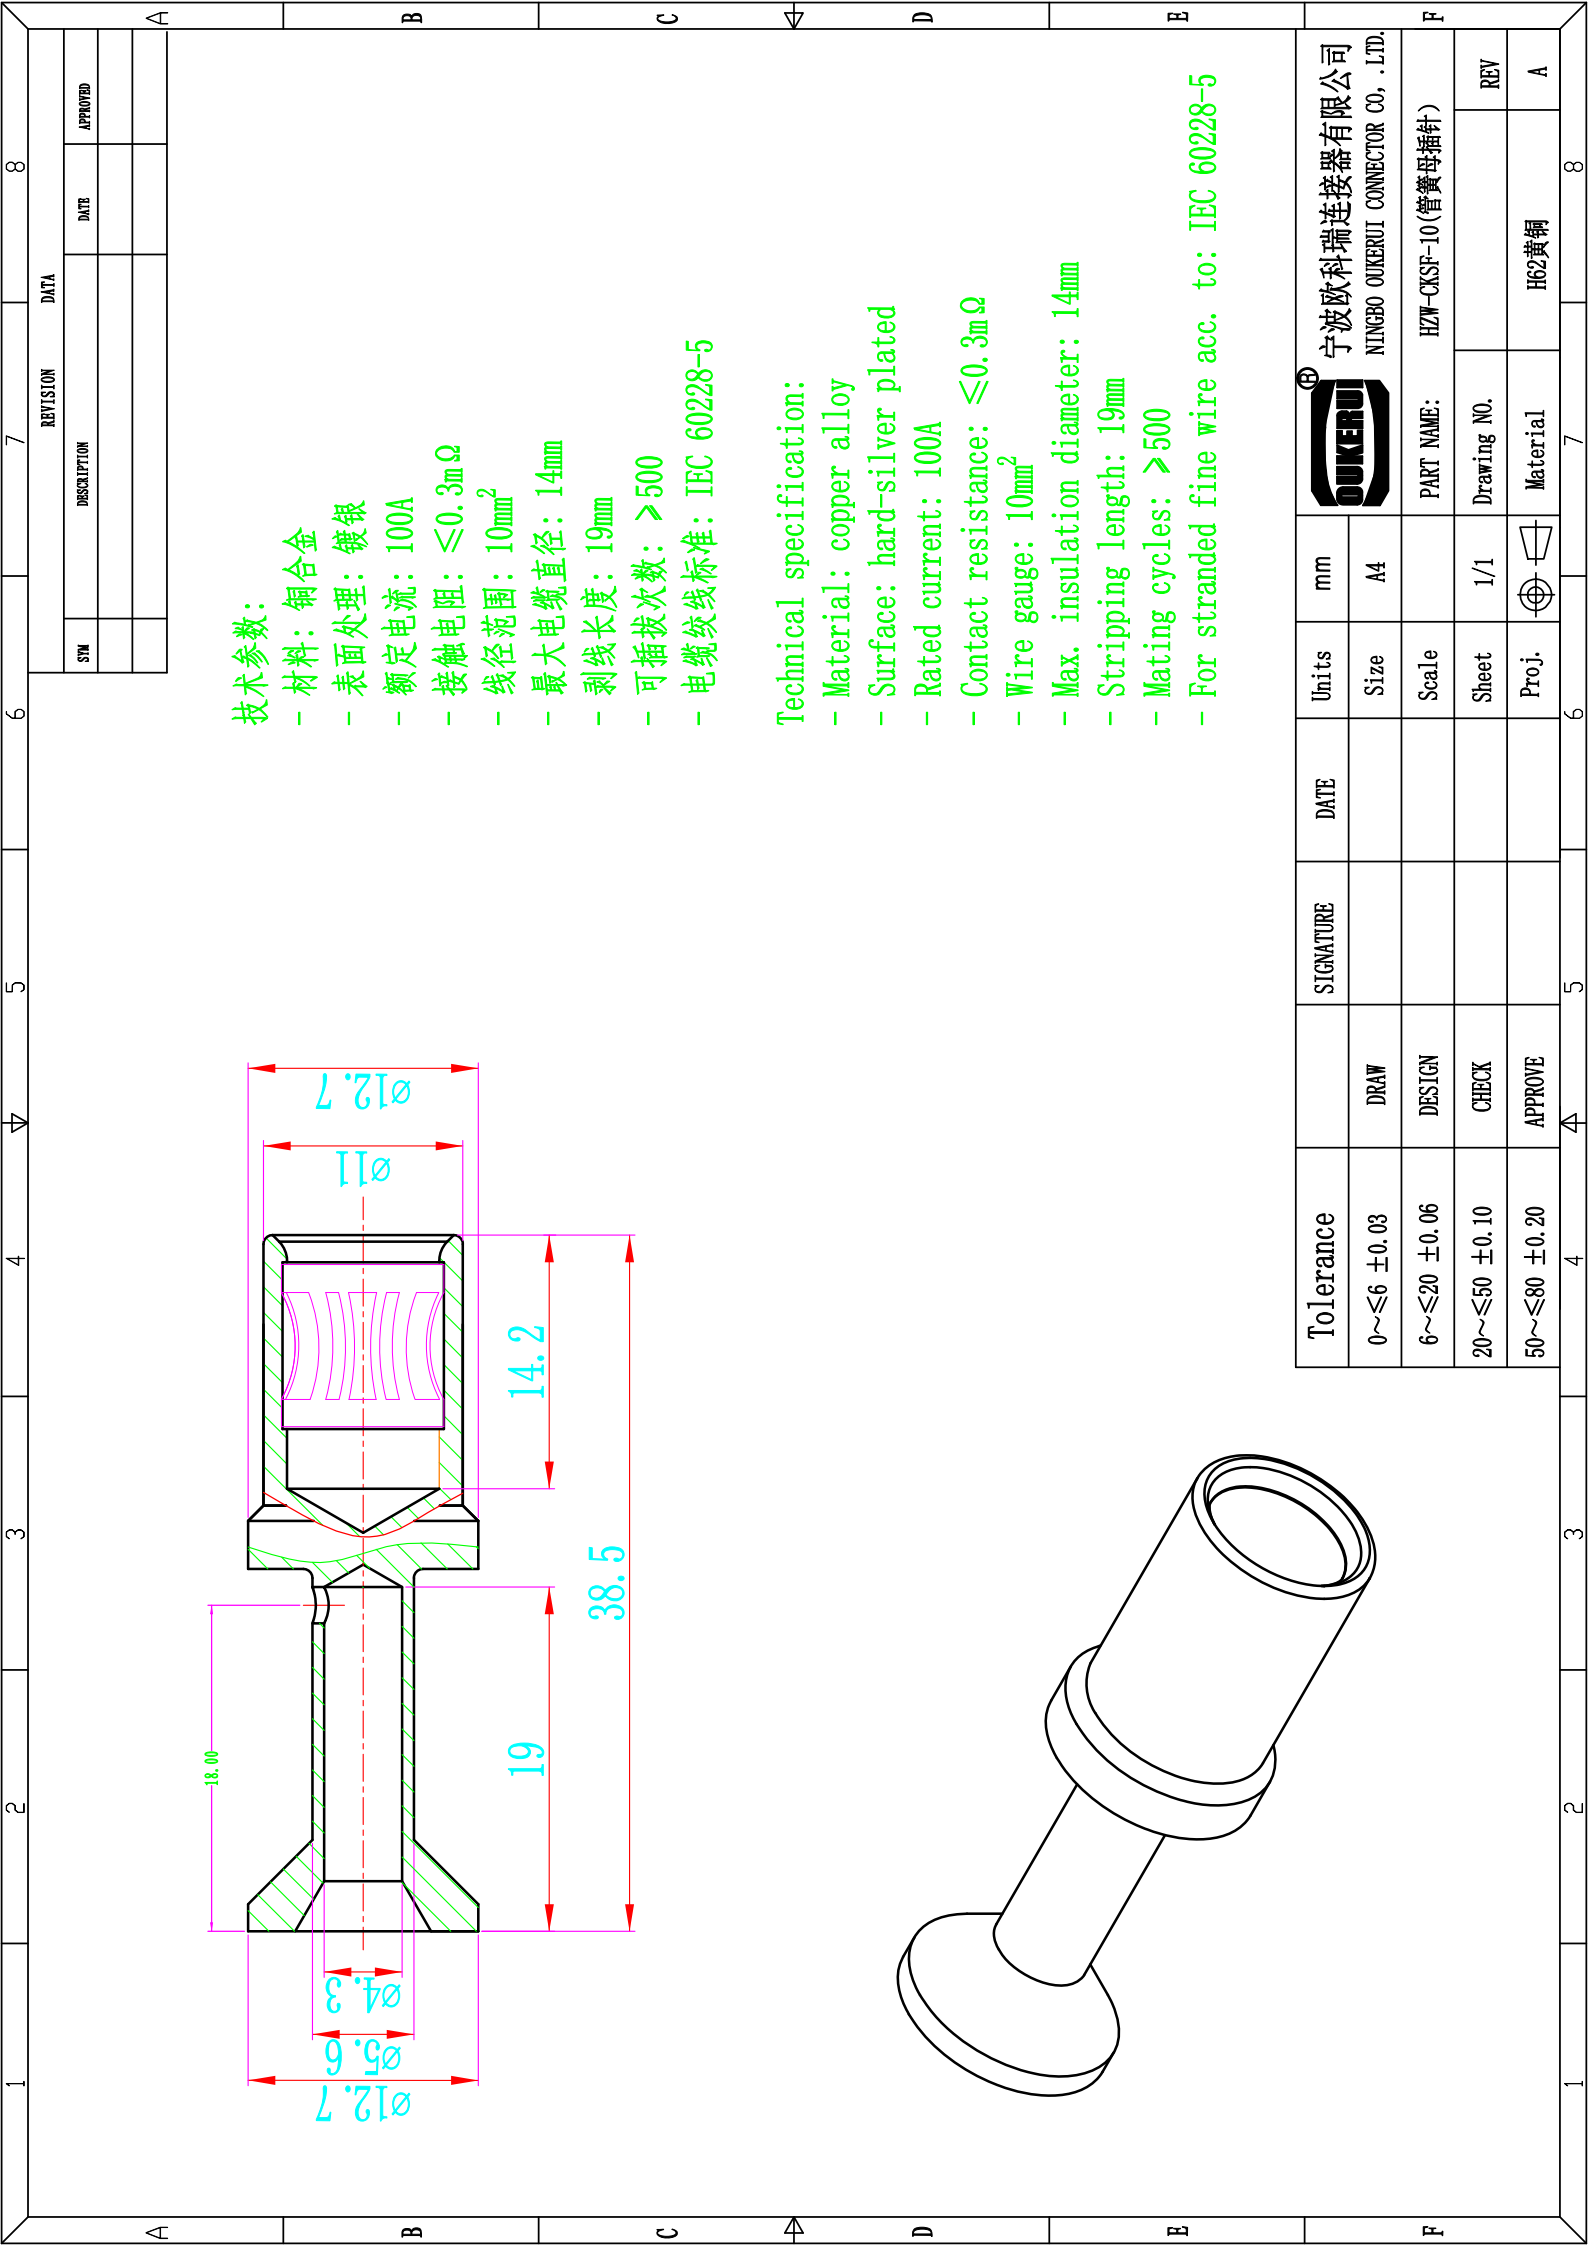

技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 100A
- 接触电阻: $\leq 0.3m\Omega$
- 线径范围: $10mm^2$
- 最大电缆直径: 14mm
- 剥线长度: 19mm
- 可插拔次数: ≥ 500
- 电缆绞线标准: IEC 60228-5

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 100A
- Contact resistance: $\leq 0.3m\Omega$
- Wire gauge: $10mm^2$
- Max. insulation diameter: 14mm
- Stripping length: 19mm
- Mating cycles: ≥ 500
- For stranded fine wire acc. to: IEC 60228-5

Tolerance		SIGNATURE	DATE	Units	mm	NINGBO OUKERUI CONNECTOR CO., .LTD.		
0~≤6	±0.03	DRAW		Size	A4	NINGBO OUKERUI CONNECTOR CO., .LTD.		
6~≤20	±0.06	DESIGN		Scale		NINGBO OUKERUI CONNECTOR CO., .LTD.		
20~≤50	±0.10	CHECK		Sheet	1/1	NINGBO OUKERUI CONNECTOR CO., .LTD.		
50~≤80	±0.20	APPROVE		Proj.		NINGBO OUKERUI CONNECTOR CO., .LTD.		

Tolerance		SIGNATURE	DATE	Units	mm	NINGBO OUKERUI CONNECTOR CO., .LTD.		
0~≤6	±0.03	DRAW		Size	A4	NINGBO OUKERUI CONNECTOR CO., .LTD.		
6~≤20	±0.06	DESIGN		Scale		NINGBO OUKERUI CONNECTOR CO., .LTD.		
20~≤50	±0.10	CHECK		Sheet	1/1	NINGBO OUKERUI CONNECTOR CO., .LTD.		
50~≤80	±0.20	APPROVE		Proj.		NINGBO OUKERUI CONNECTOR CO., .LTD.		

Tolerance		SIGNATURE	DATE	Units	mm	NINGBO OUKERUI CONNECTOR CO., .LTD.		
0~≤6	±0.03	DRAW		Size	A4	NINGBO OUKERUI CONNECTOR CO., .LTD.		
6~≤20	±0.06	DESIGN		Scale		NINGBO OUKERUI CONNECTOR CO., .LTD.		
20~≤50	±0.10	CHECK		Sheet	1/1	NINGBO OUKERUI CONNECTOR CO., .LTD.		
50~≤80	±0.20	APPROVE		Proj.		NINGBO OUKERUI CONNECTOR CO., .LTD.		

Tolerance		SIGNATURE	DATE	Units	mm	NINGBO OUKERUI CONNECTOR CO., .LTD.		
0~≤6	±0.03	DRAW		Size	A4	NINGBO OUKERUI CONNECTOR CO., .LTD.		
6~≤20	±0.06	DESIGN		Scale		NINGBO OUKERUI CONNECTOR CO., .LTD.		
20~≤50	±0.10	CHECK		Sheet	1/1	NINGBO OUKERUI CONNECTOR CO., .LTD.		
50~≤80	±0.20	APPROVE		Proj.		NINGBO OUKERUI CONNECTOR CO., .LTD.		