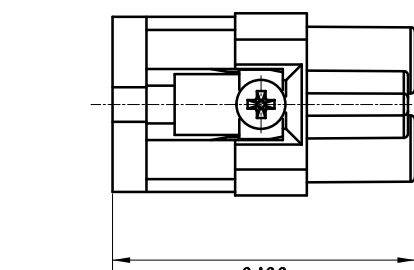
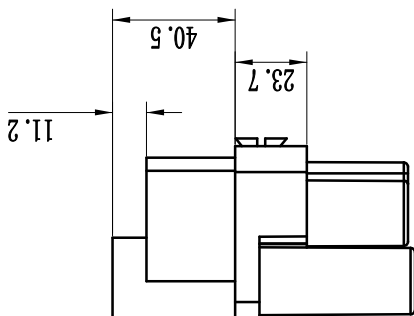




	1	2	3	4	5	6	7	8
A								
B								
C								
D								
E								
F	A							
技术参数:								
插芯:								
插针数: 2+PE								
额定电流: 40A								
工作电压: 830V								
额定脉冲电压: 6KV								
污染等级: 3								
依据UL/CSA的额定电压: 600V								
绝缘阻抗: ≥10 ¹⁰ Ω								
材料: 聚碳酸酯								
温度范围: -40℃~+125℃								
依据UL94的阻燃等级: V0								
可插拔次数: ≥500								
Specifications:								
Inserts:								
Number of contacts: 2+PE								
Rated current: 40A								
Rated voltage: 830V								
Rated impulse voltage: 6KV								
Pollution degree: 3								
Rated voltage acc.to UL/CSA:600V								
Insulation resistance: ≥10 ¹⁰ Ω								
Material: Polycarbonate								
Limiting temperatures: -40℃~+125℃								
Flammability acc.to(UL94): V0								
Mechanical working life -mating cycles: ≥500								
Contacts:								
Terminal: Axial screw terminal								
Material: Brass								
Surfac: hard-silver plated								
Contact resistance: ≤1mΩ								
Wire gauge--mm² : 4-10mm² (AWG12-8)								
Stripping length:9mm								
Tightening Torque: 1.8Nm								
Interline connection: 材料: 铜合金 表面处理: 镀银 接触电阻: ≤1mΩ 线径范围: 4-10mm² (AWG12-8) 剥线长度: 9mm 拧紧力矩: 1.8Nm								
插针: 接线方式: 轴向螺栓连接 材料: 铜合金 表面处理: 镀银 接触电阻: ≤1mΩ 线径范围: 4-10mm² (AWG12-8) 剥线长度: 9mm 拧紧力矩: 1.8Nm								
Terminl: Axial screw terminal Material: Brass Surfac: hard-silver plated Contact resistance: ≤1mΩ Wire gauge--mm² : 4-10mm² (AWG12-8) Stripping length:9mm Tightening Torque: 1.8Nm								
Tolerance								
0~≤20 ±0.15 DRAW								
20~≤50 ±0.25 DESIGN								
50~≤80 ±0.35 CHECK								
80~≤120 ±0.50 APPROVE								
SIGNATURE								
DATE								
Units								
Size								
Scale								
Sheet								
Proj.								
Drawing NO.								
Material								
PART NAME: HZW-HQ-002. 2-F (4-10mm2)								
REV								
A								
NINGBO OUKERUI CONNECTOR CO., LTD.  宁波欧科瑞连接器有限公司								